
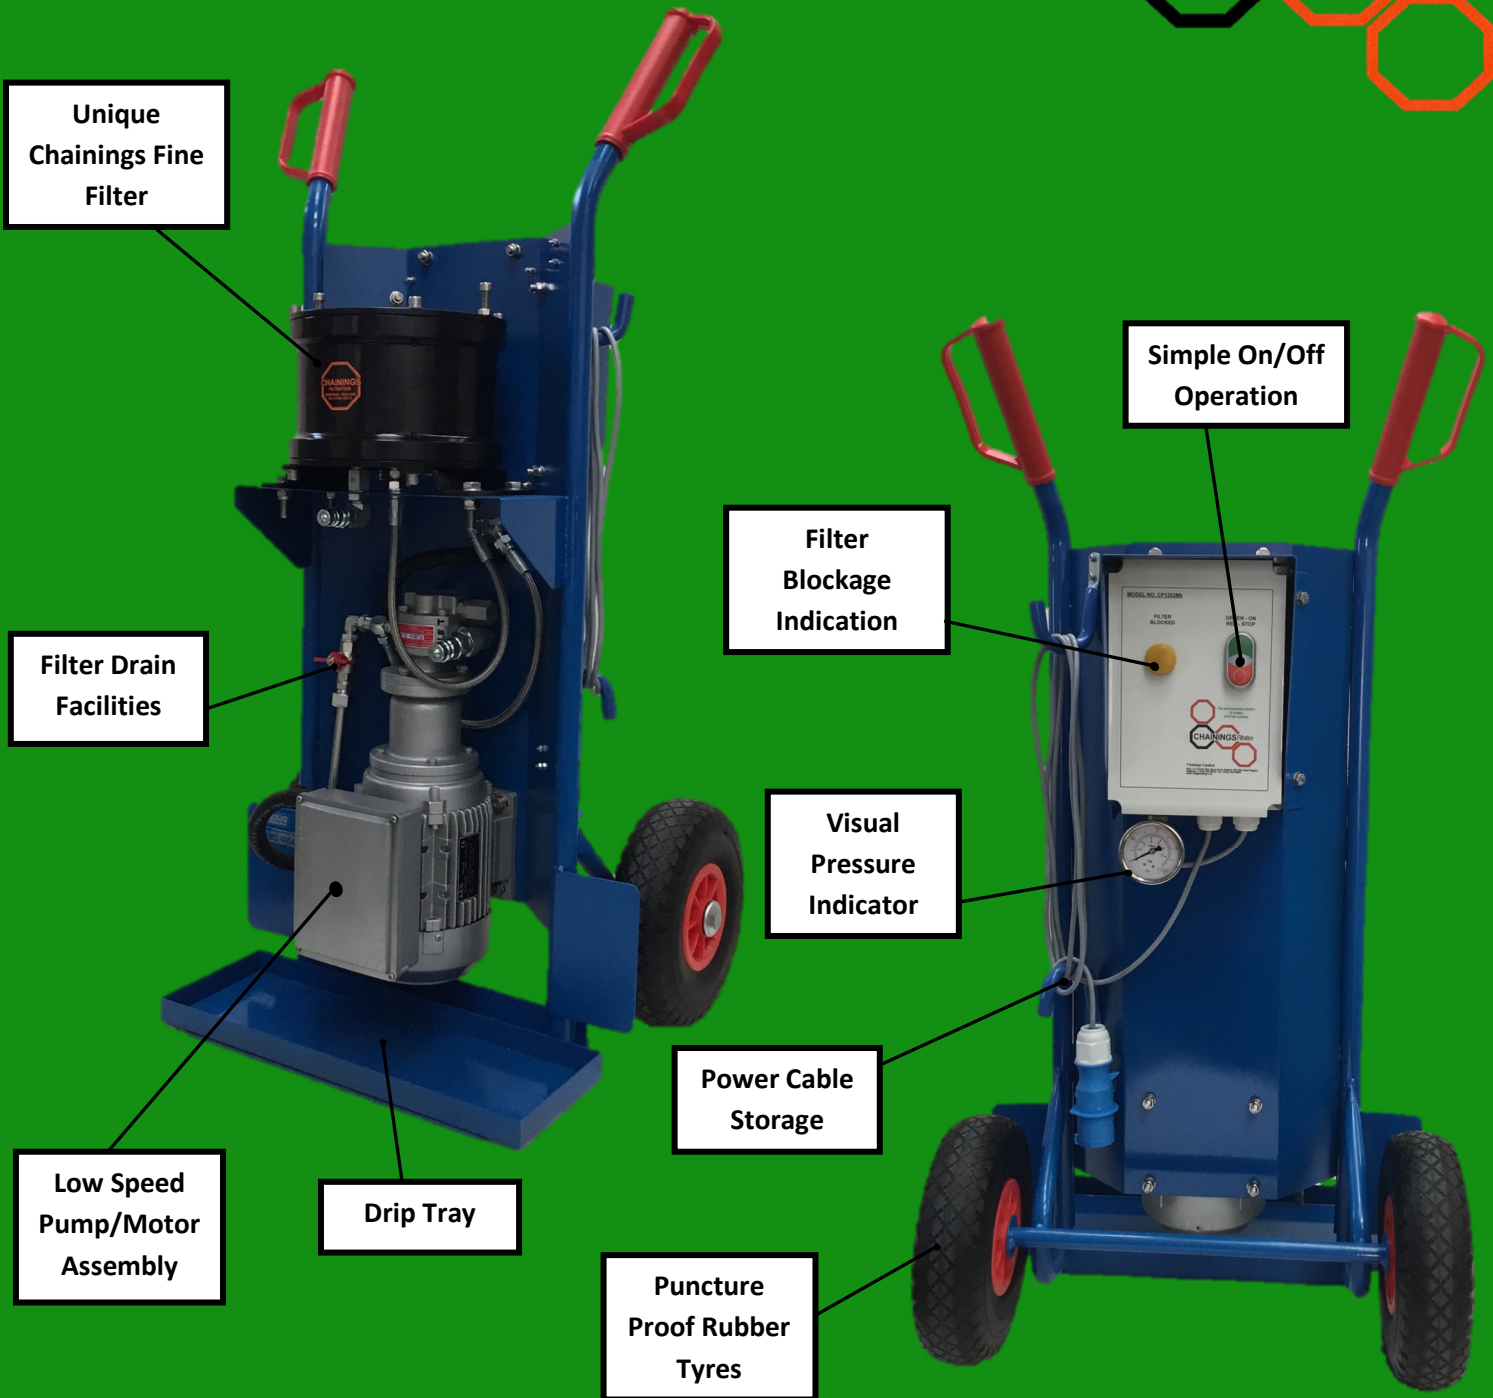


CHAININGS PORTABLE FILTER UNIT FOR USE ON DIESEL FUEL

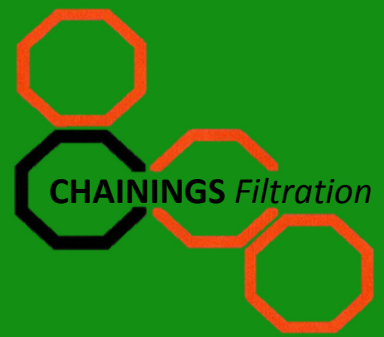

Designed for application on Diesel Fuel transfer and system cleaning processes.

Unit can be left operating unattended with automated Power Isolation in the event of filter blockage.


The unique Chainings Filter will capture and retain water contamination AND dirt/wear particles over 1 Micron to achieve high levels of fuel cleanliness.

Ability to clean Diesel Fuel to ISO4406 14/12/09

Regular use of the Chainings Portable Diesel Fuel Filter Unit will provide benefits in extended system reliability and reduced maintenance downtime.

TECHNICAL SPECIFICATIONS

- Unit Model	CP1202
- Filter Type	CHO2010H
- Electrical Power Supply	220V 50Hz 1Phase (Options available)
- Protection Standard	IP55
- Unit Inlet Port connection	½" BSP Series A "Snap-On" Male Adaptor
- Unit Outlet Port Connection	3/8" BSP Series A "Snap-On" Male Adaptor
- Connection Hose Standard	Stainless Steel Braided PTFE Flexible Hose with mating Female "Snap-On" adaptors
- Maximum Lift	4 Metres (See Picture)
- Maximum Head	3 Metres
- Nominal Flow Rate	400 Litres per Hour
- Nominal Unit Operating Pressure	3 Bar
- Filter Blockage Pressure	9 Bar
- Replacement Filter element	OCH2010
- Filter Efficiency (ISO16009)	3 Micron @99.87 5 Micron @99.92
- Max Water retention per element	400cc
- Unit Weight	50Kgs
- Unit Nominal Dimensions	110*60*45cms

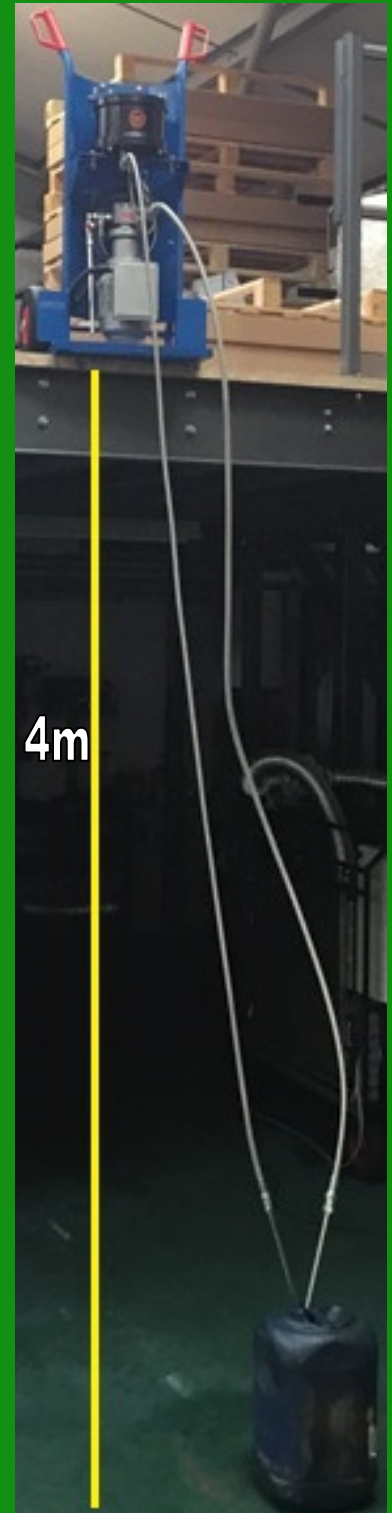

Each unit supplied with 3 Metre long Power supply cable and Connection Hoses.

Hoses fitted with 0.65 Metre long Steel Standpipes

For replacement filter quote OCH2010

Chainings Limited
 Units 1&2, Harrow Park, Hereford, United Kingdom, HR4 0EN
 Tel: 0044 (0) 1432356318
 sales@chainings.com
 www.chainings.com